

Waterproof coating for wet areas, joint and finish for waterproof plasterboard

Product Overview

Hydro 510 is a jointing mortar for most masonry surfaces, including sand/cement plaster and waterproof plasterboard. It provides a uniform, high-quality surface for painting. Hydro 510 Water Repellent is specially formulated for use in areas such as kitchens, bathrooms, and hallways where painted surfaces may become damp and wet from time to time.




Properties

Hydro 510 is produced from a select blend of precisely sized filler polymers.

The product is:

- Easy to use
- Excellent adhesion
- Applies up to 2 mm thick
- High coverage
- Fast drying
- Vapor permeable
- Waterproof
- Can be used in wet areas
- Washable

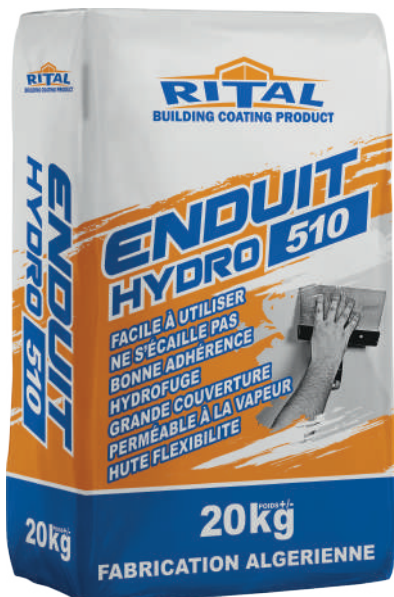

Technical Data

Statistical results obtained under standard conditions

[illegible]

Application method

SURFACE PREPARATION

Make sure all dust, dirt, and foreign matter are swept away. Sharp edges and oil should also be removed. We recommend using a RITA FIX+ primer if dusting or flaking surfaces occur.

APPLICATION AND TOOL CLEANING

Apply the filler in a thin, even coat. If a thick coat is required, apply several thin coats, allowing time to dry between coats. Lightly sand the final surface before painting, preferably within 24 hours of application.

Presentation

20 kg laminated paper bags.

Storage for up to 1 year in the original packaging, protected from weather and humidity.

Note

The instructions in this manual are based on our tests and knowledge, and do not imply any commitment on the part of SARL RITAL or release the consumer from the responsibility of checking and verifying the products for their correct use.

Claims must be accompanied by the original packaging to allow for proper traceability.

SARL RITAL assumes no responsibility, under any circumstances, for the application of its products or construction solutions by the application company or other parties involved in the application and/or execution of the project in question. RITAL's liability is limited exclusively to possible damages directly or exclusively attributable to the products supplied, individually or integrated into systems, due to manufacturing defects.

